


# SEWAGE PUMP SUBMERSIBLE

Designed for permanent installation and a maximum lift of 15' (4.5m) for light commercial, residential and cottages.

MODEL  
**400510**

## FEATURES:

- 1/2 HP 115V 60 Hz. motor. Oil filled with automatic thermal and overload protection.
- Vortex impeller, clog free type, made from glass filled Noryl, will not corrode, maintains pumping performance, year after year.
- Pump body made from rugged iron type, 2" suction and discharge.
- Standard stainless steel mechanical rotary seal.
- Vertical switch type 15A tested for 1 million cycles. Ideal for restricted sump pits.
- SJTW, 9' cord, piggy back type.
- Capacity up to 4 500 US GPH.

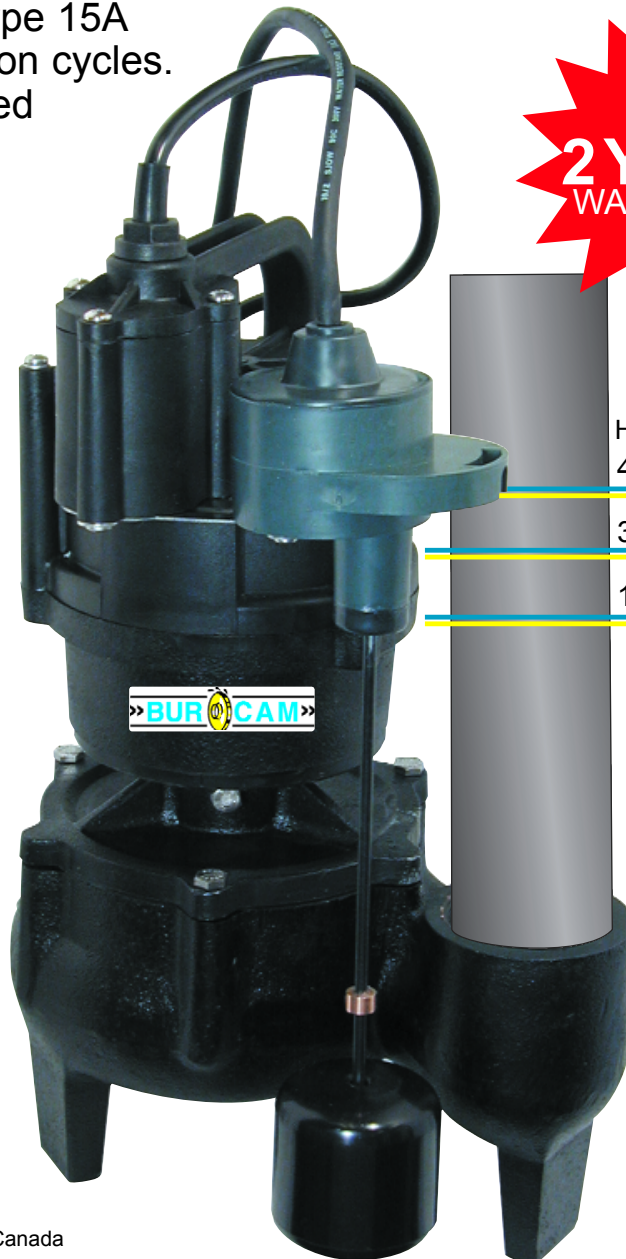

HEAD	LPH	HEAD	USGPH
4.5 m	2725	15'	720
3.0 m	11800	10'	3120
1.5 m	17000	5'	4500

FRICION  
LOSS IN  
PIPE NOT  
INCLUDED

**1/2 HP**  
115V AC  
60Hz

## APPLICATIONS:

- This submersible sewage pump is designed and suitable for raw sewage applications where the total head requirements do not exceed 15 feet.