


FEATURES:

- ☐ TEFC motor 3/4HP 115/230V 60Hz
totally enclosed, bearing to bearing, stainless steel
shaft with automatic thermal and overloaded protection.
- ☐ Stainless steel pump body, large capacity, easy to prime.
- ☐ Designed for intermediate or continuous operation.
- ☐ High performance noryl impeller.
- ☐ Built-in Noryl injector
- ☐ Stainless steel rotary mechanical seal.
- ☐ 1" garden hose adaptor included.
- ☐ Strong and practical transportation handle.
- ☐ Capacity up to 900 US GPH.

SPRINKLER PUMP

Designed for a
maximum vertical
lift of 25' (7.5m)
which water
source can be
a well, a sand
point, a lake
or a river.

MODEL
506530SS

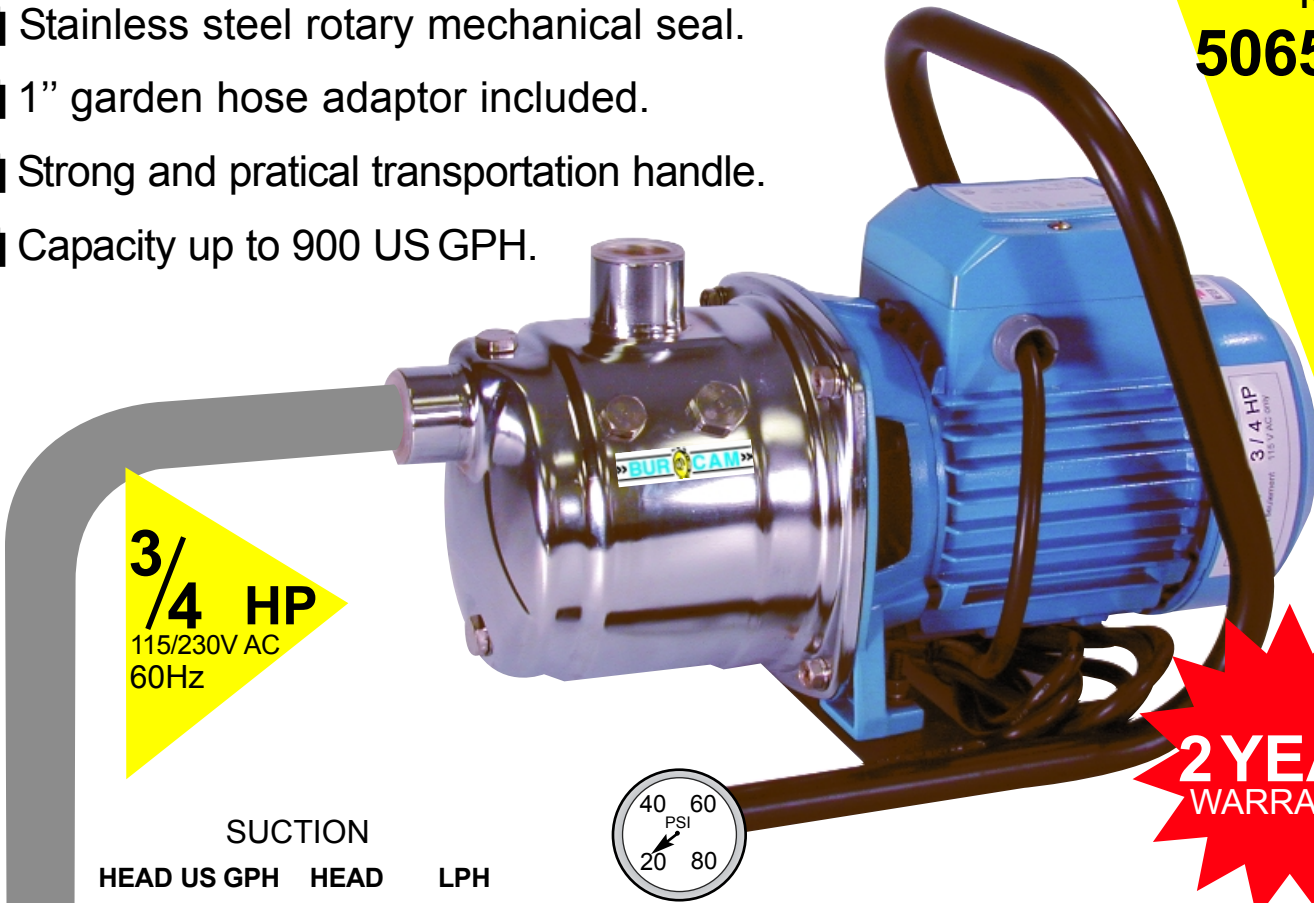

3/4 HP
115/230V AC
60Hz

SUCTION
HEAD US GPH HEAD LPH

5'	900	1.5m	3400
10	750	3.0m	2840
15'	640	4.5m	2425
20'	560	6.0m	2120
25'	475	7.5m	1800



FRICION
LOSS IN
PIPE NOT
INCLUDED

APPLICATION:

- ☐ To be used in a residential,
cottage and farm
application